




MondoTalk Guide - Grandstream Cordless DP750

Step1 Pairing to the base station

By default, your DP720 (the handset) is not paired with the DP750 (the base station). Following the instructions below will allow you to pair at least one handset to your base station. If your handset is already paired with your base station, you may proceed to step 2 of our setup guide.

- Assuming that the base station is fully powered and your handset is fully charged; press/hold the radio/page button on the base station (indicated by the icon ) for 7 seconds
- Next, while the radio icon on the base station is blinking go to the handset itself and press menu and from there navigate to Settings >> Registration >> Register
- From the Subscribe Base selection screen, select the base station you would like to associate with, and select Subscribe


Once completed, if your handset has successfully paired with the base station, you should receive a Handset Subscribed notification on the screen.

Note If you do run into any issues pairing your handset to your base station, please refer to the [DP750 user manual](#) for additional information.

Step2 Logging into your base station

Before you can log into your base station's web configurations, you will need to retrieve the IP Address of your base station. To do so, from your handset, press the menu key and navigate to Status >> IP Address.

Next, open a web browser on your computer (Chrome, Firefox, Internet Explorer, Safari, etc) and enter the IP Address that is displayed on your phones LCD screen into the address bar. You should be presented with a login screen similar to the screenshot below:

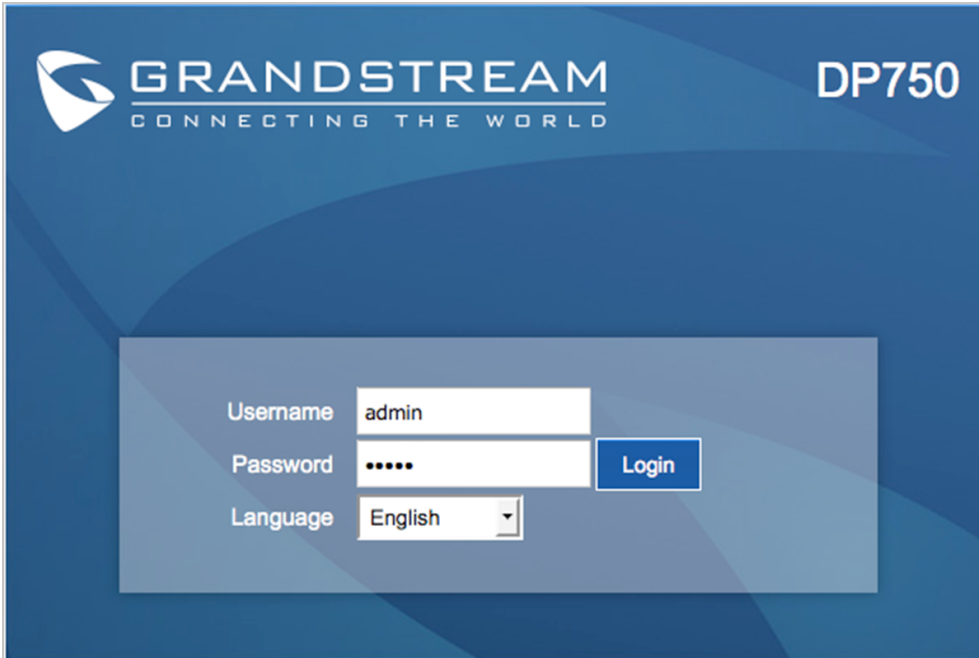


The screenshot shows the login page for a Grandstream DP750 device. The page has a blue background with the Grandstream logo and tagline 'CONNECTING THE WORLD' in the top left, and 'DP750' in the top right. The login form is centered and contains three input fields: 'Username' with the value 'admin', 'Password' with five dots, and 'Language' with a dropdown menu set to 'English'. A blue 'Login' button is positioned to the right of the password field.

Login to the DP750's administrative interface by using the default username (admin) and default password (admin).

Step3 Configuring MondoTalk Account

From the top menu bar, locate the sub menu option Profiles >> Profile 1 >> General Settings; as indicated by the screenshot below:

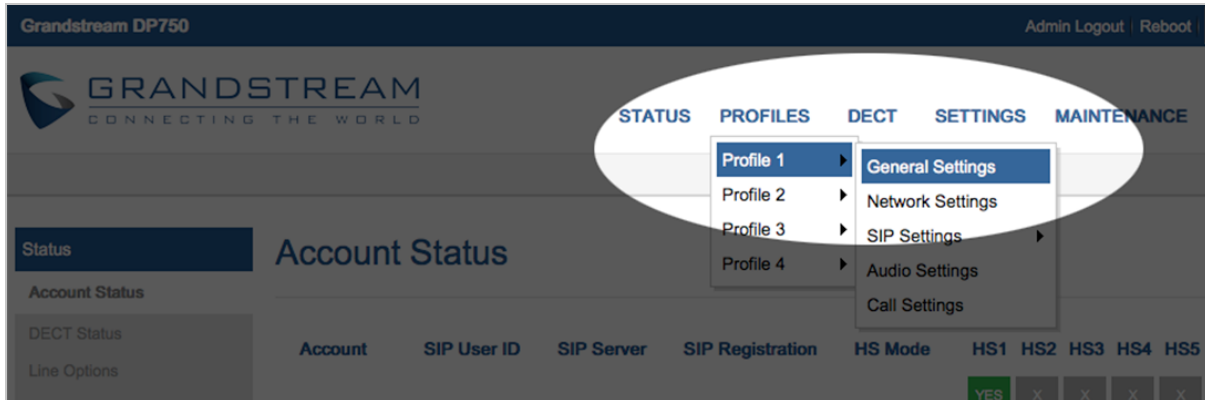

You should now be in the General Settings configuration page. Please use the settings detailed in the screen captures below. After you have finished entering these settings, click on the Save and Apply button to apply/save your settings:


Enter the following details

Profile active = Yes

SIP Server = Enter the appropriate server below

- For sip accounts = sip99.mondotalk.com
- For PBX extensions = cloud-pbx-01.mondotalk.net

From the top menu bar, locate the sub menu option **DECT >> SIP Account Settings**; as indicated by the screenshot below:

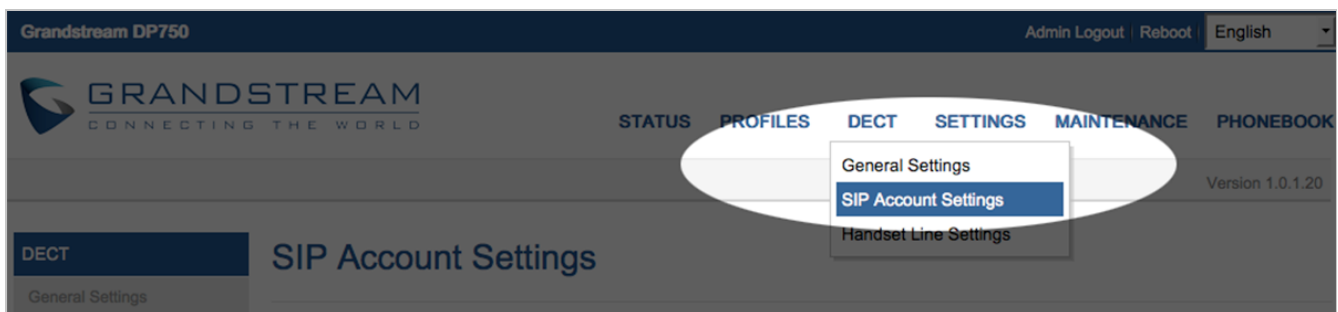

On this page, for **Account 1**, specify the following parameters as indicated below. Once completed, click on the **Save and Apply** button to save your changes:

Enter the following details

SIP user ID: Enter the SIP username or extension username

Authenticate ID: Same as above

Password: Enter the account password

Name: You may specify any name on this field

Active: Set to yes